

1c837 U.S. PTO  
06/15/00

Case Docket No.: 7125

Patent Department  
ZENITH ELECTRONICS CORPORATION  
1000 Milwaukee Avenue  
Glenview, Illinois 60025-2493  
(847) 391-8014

JC836 U.S. PTO  
09/595068  
06/15/00

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

**Inventors:** David S. Tait

**For:** Smart Antenna For RF Receivers

Enclosed are specification, claims, Declaration and Power of Attorney and 1 page of informal drawings.

### FEE CALCULATION

CLAIMS AS FILED					
	FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE
					\$ 690.00
	TOTAL CLAIMS (20 allowed)	36	16	\$18.00	\$288.00
	INDEPENDENT CLAIMS (3 allowed)	3	0	\$78.00	\$ .00
				TOTAL FILING FEE	\$978.00

Please charge Deposit Account No. 26-0175 in the amount of \$978.00. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to this account. A duplicate copy of this sheet is enclosed.

References attached.

*Jack Kail*  
\_\_\_\_\_  
Attorney of Record  
Reg. No.27,566

Express Mail mailing label number: EL639947088US

Date of Deposit: *June 15, 2000*

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, D.C. 20231

Patricia A. Wiederer

(Type or printed Name of Person Mailing paper or fee)

*Patricia A. Wiederer*  
\_\_\_\_\_  
(Signature of person mailing paper or fee)

09595068-061500

## SMART ANTENNA FOR RF RECEIVERS

### Technical Field of the Invention

The present invention relates to the automatic positioning of an antenna in response to channel selection.

### Background of the Invention and Prior Art

Antennas are provided as accessories of RF receivers in order to provide the receivers with the capability of receiving RF signals that are transmitted over the air. Typical antennas that are used in connection with RF receivers, such as televisions, are more sensitive to the signal emitted by a transmitter in some orientations than in others. Thus, when installing an antenna in an area serviced by a plurality of transmitters, the antenna is moved to various orientations in an effort to find the one orientation that provides acceptable reception from all appropriate transmitters.

Unfortunately, while one orientation is best for one transmitter, that orientation is seldom best for other transmitters. This problem escalates as the number of possible transmitters increases. Accordingly, it is known to provide antennas with motors that may be remotely controlled by a user. Thus, when the user selects an RF

channel for reception, the user remotely controls the motor in order to rotate the antenna until reception by the RF receiver is optimized. This manual approach to the aiming of an antenna is time consuming because the acquisition of optimized reception usually requires a trial and error manual rotation of the antenna each time that a new channel is selected.

The present invention is directed to the automatic rotation of an antenna.

#### Summary of the Invention

In accordance with a first aspect of the invention, a system for automatically positioning an antenna comprises a motor and a controller. The motor is arranged to be coupled to the antenna. The controller is coupled to the motor, and the controller is arranged to control the motor in response to selection of a channel so as to automatically drive the antenna to a position at which the antenna is aimed at a source of a signal associated with the selected channel. The controller drives the motor to the position based upon a location of the signal source and a location of the antenna.

In accordance with another aspect of the invention, a controller controls the automatic positioning of an antenna. The controller is arranged to drive the antenna to a position dependent upon (i) a channel selected by a user, (ii) a location of the antenna, and (iii) a location of a source of a signal associated with the selected channel.

In accordance with still another aspect of the invention, a method of positioning an antenna comprises a) automatically computing a path through which an antenna is to be moved from a first position to a second position, wherein the automatic computation is based upon a location of a remote source corresponding to a channel to which a tuner is tuned by a user and upon a location of the tuner, wherein the first position of the antenna is a current position of the antenna, and wherein the second position of the antenna is a position at which the antenna is aimed at the remote source, and b) moving the antenna through the automatically computed path.

Brief Description of the Drawings

These and other features and advantages of the invention will be apparent upon reading the following description in conjunction with the single figure of the drawing which illustrates an exemplary automatic antenna rotation arrangement according to an embodiment of the present invention.

Description of the Invention

As shown in the drawing, an RF receiver 10, such as a television, is provided with an antenna array 12. The antenna array 12 includes a low VHF antenna 14, a high VHF antenna 16, and a UHF antenna 18. The low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 are mechanically mounted on a common mast 20 driven by a motor 22. Accordingly, when the motor 22 is energized, it drives the common mast 20 in order to rotate the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 in unison.

Each of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 is electrically coupled to a switch 24. Depending upon the channel selected by the

user, the switch 24 selectively couples one of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 to a low noise, variable gain amplifier 26 whose output is electrically coupled to a variable frequency FM trap 28 of the RF receiver 10. The variable frequency FM trap 28 notches out signals from any unwanted FM station in the receiving path of the antenna corresponding to a selected channel. The variable frequency FM trap 28 provides the signal from the selected one of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 to a tuner 30 of the RF receiver 10. The tuner 30 tunes to the channel selected by the user of the RF receiver 10 under control of a microprocessor 32.

The microprocessor 32 stores the known locations of all wanted transmitters providing RF signals that can be received by the RF receiver 10. For example, the microprocessor 32 may store these locations in memory by latitude and longitude. A global position sensor 34 is provided with the RF receiver 10. Accordingly, when the user selects a channel corresponding to one of the known transmitters whose location is stored in memory by the microprocessor 32, the microprocessor 32 operates the switch

24 to select the one of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 which is appropriate to the selected channel. The microprocessor 32 also calculates an angle of rotation based upon the stored global location of the transmitter corresponding to the selected channel and upon the global position of the RF receiver 10 as provided by the global position sensor 34. The microprocessor 32 then drives the motor 22 to rotate the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 of the antenna array 12 through that angle of rotation so that the antenna corresponding to the selected channel is aimed at the transmitter transmitting the signal for that selected channel.

The microprocessor 32 can also store the locations of all known FM stations as well as other offending sources.

Accordingly, when the microprocessor 32 causes the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 to be aimed at a transmitter corresponding to a selected channel, the microprocessor 32 also controls the variable frequency FM trap 28 to notch out the signal from any unwanted FM station that is effectively in the receiving path of the positioned antenna.

Similarly, the microprocessor 32 can also store the locations of airports and geographical topography. Accordingly, when the microprocessor 32 causes the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 to be aimed at a transmitter corresponding to a selected channel, the microprocessor 32 also increases AGC speed through an AGC speed control 36 in order to minimize airplane flutter when an airplane flight path is in the receiving path of the positioned antennas. Also, the microprocessor 32 can control a ghost canceller 38 and/or an adaptive equalizer 40 in order to cancel ghosts caused by multipath transmissions (reflections) when ghost producing geographical topography is effectively in the receiving path of the positioned antenna.

Moreover, when the microprocessor 32 causes the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 to be aimed at a transmitter corresponding to a selected channel, the microprocessor 32 calculates the received signal strength associated with the selected channel and adjusts the gain of the low noise, variable gain amplifier 26 appropriately. For example, the microprocessor 32 can store in its memory the known transmission powers of



the transmitters whose locations are also stored in its memory. The microprocessor 32 can also calculate the distance between the RF receiver 10 and the transmitter corresponding to the selected channel based upon the stored location of this transmitter and the location of the receiver 10 as supplied by the global position sensor 34. The microprocessor 32 can then determine the received power based upon the stored transmitted power for that transmitter and the calculated distance. Thus, if the received power is too strong because the RF receiver 10 is close to the transmitter corresponding to the selected channel, the microprocessor 32 can reduce the gain of the low noise, variable gain amplifier 26. Conversely, if the received power is too weak because the RF receiver 10 is far from the transmitter corresponding to the selected channel, the microprocessor 32 can increase the gain of the low noise, variable gain amplifier 26.

Alternatively, optimum gain may be determined at installation by automatically adjusting the gain of the low noise, variable gain amplifier 26 as the antenna array 12 is aimed at each transmitter, and by storing the optimum gain for each transmitter in the memory of the microprocessor 32.

Thus, when the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 are aimed at a transmitter, the microprocessor 32 retrieves the corresponding gain from memory and adjusts the gain of the low noise, variable gain amplifier 26 accordingly.

Certain modifications and alternatives of the present invention have been discussed above. Other modifications and alternatives will occur to those practicing in the art of the present invention. For example, the RF receiver 10 is provided with the antenna array 12 which includes the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18. Instead, the antenna array 12 may include any combination of one or more of these antennas. Alternatively, the functions of the low VHF antenna 14, the high VHF antenna 16, and/or the UHF antenna 18 may be combined in fewer antennas, such as a single antenna.

Also, as described above, the RF receiver 10 includes the global position sensor 34 to supply the global position of the RF receiver 10 to enable the microprocessor 32 to calculate an angle of rotation for the motor 22. Instead, the global position sensor 34 may be eliminated from the RF receiver 10 by storing the global position of

the RF receiver 10 in the memory of the microprocessor 32 such as at the time that the RF receiver 10 is installed.

Moreover, as described above, the position of an antenna is controlled based upon the global positions of the transmitter corresponding to a selected channel and of the RF receiver. Other arrangements may be provided, however, to aim an antenna at a transmitter corresponding to a selected channel. For example, the microprocessor 32 may store compass directions of the various transmitters servicing the RF receiver 10. The microprocessor 32 may be arranged then to rotate the antenna to the stored compass direction corresponding to a selected channel, using a compass 42 as feedback during rotation of the antenna to the desired compass direction. Alternatively, the microprocessor 32 may be arranged to calculate the proper angle of rotation based upon the stored compass direction corresponding to the selected channel and upon the current reading of the compass 42, which is mounted so as to rotate with the antenna array 12. In any event, the stored compass directions may be input to the microprocessor 32 for storage at the time of installation by rotating each of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18

for each of the possible channels and noting the direction of the antenna at which reception is best for the corresponding channel.

As another example, the angles of rotation from a reference point can be computed at the time of installation for each transmitter by rotating each of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 from the reference point to a position producing the best reception for the corresponding channel. Each angle of rotation so computed may then be stored in the memory of the microprocessor 32. Other similar arrangements are possible.

This reference point can be periodically calibrated by reference to the compass 42 mounted so as to rotate with the antenna array 12. Alternatively, the reference point can be periodically calibrated by seeking the angle of rotation at which reception is best for a known transmitter. For this purpose, the known transmitter may correspond to the reference point. Gain can also be periodically calibrated by varying the gain of the low noise, variable gain amplifier 26 at each of the antenna positions and by restoring in memory the gain corresponding to maximum signal strength for each of these positions.

In addition, the present invention has been described above in connection with aiming antennas at transmitters. Such transmitters may be ground-based transmitters or other sources of television and/or radio transmissions.

Moreover, as described above, the locations of the transmitters to which the antenna array 12 may be aimed are stored in the memory of the microprocessor 32. Instead, these transmitter locations could be transmitted by the transmitters to which the antenna array 12 is to be aimed.

Also, the compass 42 may be used for calibration. Accordingly, at the time of installation, the motor 22 is controlled so as to point the antenna array 12 in a specified direction, such as north, based upon a reading of the compass 42. The microprocessor 32 then uses this position as a reference position for subsequent calculations of rotation.

Furthermore, as described above, the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 are mechanically mounted on a common mast 20 so that, when the motor 22 is energized, the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 rotate in unison.

Instead, the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 may be selectively coupled to the motor 22 in response to channel selection. Thus, when a channel is selected, only the antenna corresponding to the selected channel is coupled to the motor 22 which then rotates only that antenna. Alternatively, each of the low VHF antenna 14, the high VHF antenna 16, and the UHF antenna 18 may be provided with its own motor so that, when a channel is selected, only the motor coupled to the antenna corresponding to the selected channel is energized.

Accordingly, the description of the present invention is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention. The details may be varied substantially without departing from the spirit of the invention, and the exclusive use of all modifications which are within the scope of the appended claims is reserved.

WHAT IS CLAIMED IS:

1. A system for automatically positioning an antenna comprising:

a motor arranged to be coupled to the antenna;  
and,

a controller coupled to the motor, wherein the controller is arranged to control the motor in response to selection of a channel so as to automatically drive the antenna to a position at which the antenna is aimed at a source of a signal associated with the selected channel, and wherein the controller drives the motor to the position based upon a location of the signal source and a location of the antenna.

2. The system of claim 1 wherein the controller stores the location of the signal source in memory.

3. The system of claim 2 wherein the location of the antenna is supplied by a global position sensor.

4. The system of claim 1 wherein the controller stores the location of the antenna in memory.

5. The system of claim 1 wherein the location of the antenna is supplied by a global position sensor.

6. The system of claim 1 wherein the controller is arranged to drive the motor in response to a compass reading derived from a compass.

7. The system of claim 1 wherein the controller stores a location of a known offending source and reduces reception of a signal from the known offending source based upon the location of the known offending source.

8. The system of claim 7 wherein the antenna has a reception path between the antenna and the signal source, and wherein the controller blocks reception of the signal from the known offending source only if the known offending source is effectively in the reception path between the antenna and the signal source.



9. The system of claim 1 further comprising a variable gain amplifier electrically coupled between the antenna and a receiver tuned to the channel selected by the user, wherein the controller controls the gain of the variable gain amplifier according to the location of the signal source.

10. The system of claim 1 wherein the controller is arranged to cancel ghosts depending upon the position of the antenna.

11. The system of claim 1 wherein the antenna comprises first and second antennas, and wherein the controller is arranged to switch between the first and second antennas depending upon the channel selected by the user.

12. The system of claim 1 wherein the location of the signal source and the location of the antenna are global locations.

13. A controller for controlling the automatic positioning of an antenna, wherein the controller is arranged to drive the antenna to a position dependent upon (i) a channel selected by a user, (ii) a location of the antenna, and (iii) a location of a source of a signal associated with the selected channel.

14. The controller of claim 13 wherein the location of the source is stored in a memory of the controller.

15. The controller of claim 13 wherein the location of the antenna is provided by a global position sensor.

16. The controller of claim 13 further comprising a compass, wherein the controller performs a calibration based upon a reading from the compass.

17. The controller of claim 13 wherein the controller performs a calibration based upon a position of

the antenna providing the best reception from a signal source.

18. The controller of claim 17 wherein the signal source is the source of the signal associated with the selected channel.

19. The controller of claim 13 wherein the controller reduces reception of a signal from a known offending source.

20. The controller of claim 19 wherein a location of the known offending source is stored in memory of the controller.

21. The controller of claim 13 wherein the controller stores a location of a signal reflector, and wherein the controller reduces a ghost when the antenna has a position with respect to the stored location of the signal reflector to receive the ghost.

22. The controller of claim 13 wherein the controller reduces a ghost dependent upon known geographical topography.

23. The controller of claim 22 wherein a location of the known geographical topography is stored in a memory of the controller.

24. The controller of claim 13 wherein the source is a signal source, wherein the antenna has a reception path between the antenna and the signal source, wherein the controller stores a location of an offending source in the reception path, and wherein the controller reduces reception of a signal from the offending source only when the antenna is effectively aimed at the signal source.

25. The controller of claim 13 further comprising a variable gain amplifier electrically coupled between the antenna and a receiver tuned to the channel selected by the user, wherein the controller controls the gain of the variable gain amplifier according to the location of the source.

26. The controller of claim 13 wherein the antenna comprises first and second antennas, and wherein the controller is arranged to switch between the first and second antennas depending upon the channel selected by the user.

27. The controller of claim 13 wherein the location of the signal source and the location of the antenna are global locations.

28. A method of positioning an antenna comprising:

automatically computing a path through which an antenna is to be moved from a first position to a second position, wherein the automatic computation is based upon a location of a remote source corresponding to a channel to which a tuner is tuned by a user and upon a location of the tuner, wherein the first position of the antenna is a current position of the antenna, and wherein the second position of the antenna is a position at which the antenna is aimed at the remote source; and,

moving the antenna through the automatically computed path.

29. The method of claim 28 wherein the location of the remote source is stored in memory at the tuner location, wherein the stored remote source location is retrieved from the memory, and wherein the retrieved remote source location is used in the automatic computation.

30. The method of claim 28 wherein the location of the tuner is read from a global position sensor.

31. The method of claim 28 further comprising performing a calibration based upon a reading from a compass associated with the antenna.

32. The method of claim 28 further comprising performing a calibration based upon a position of the antenna providing the best reception from a reference source.

33. The method of claim 28 further comprising reducing reception of a signal from a known offending source based upon reading a location of the known offending source from memory.

34. The method of claim 28 further comprising reducing a ghost based upon reading a location of geographical topography from memory.

35. The method of claim 28 further comprising varying gain of a variable gain amplifier according to the location of the remote source.


36. The method of claim 28 wherein the antenna comprises first and second antennas, and wherein the method further comprises switching between the first and second antennas depending upon the channel selected by the user.

ABSTRACT OF THE DISCLOSURE

A controller controls the automatic positioning of an antenna. The controller is arranged to position the antenna dependent upon a channel selected by a user, a location of a receiver tuned to the selected channel, and a location of a source of a signal associated with the selected channel.

00595068-0611000



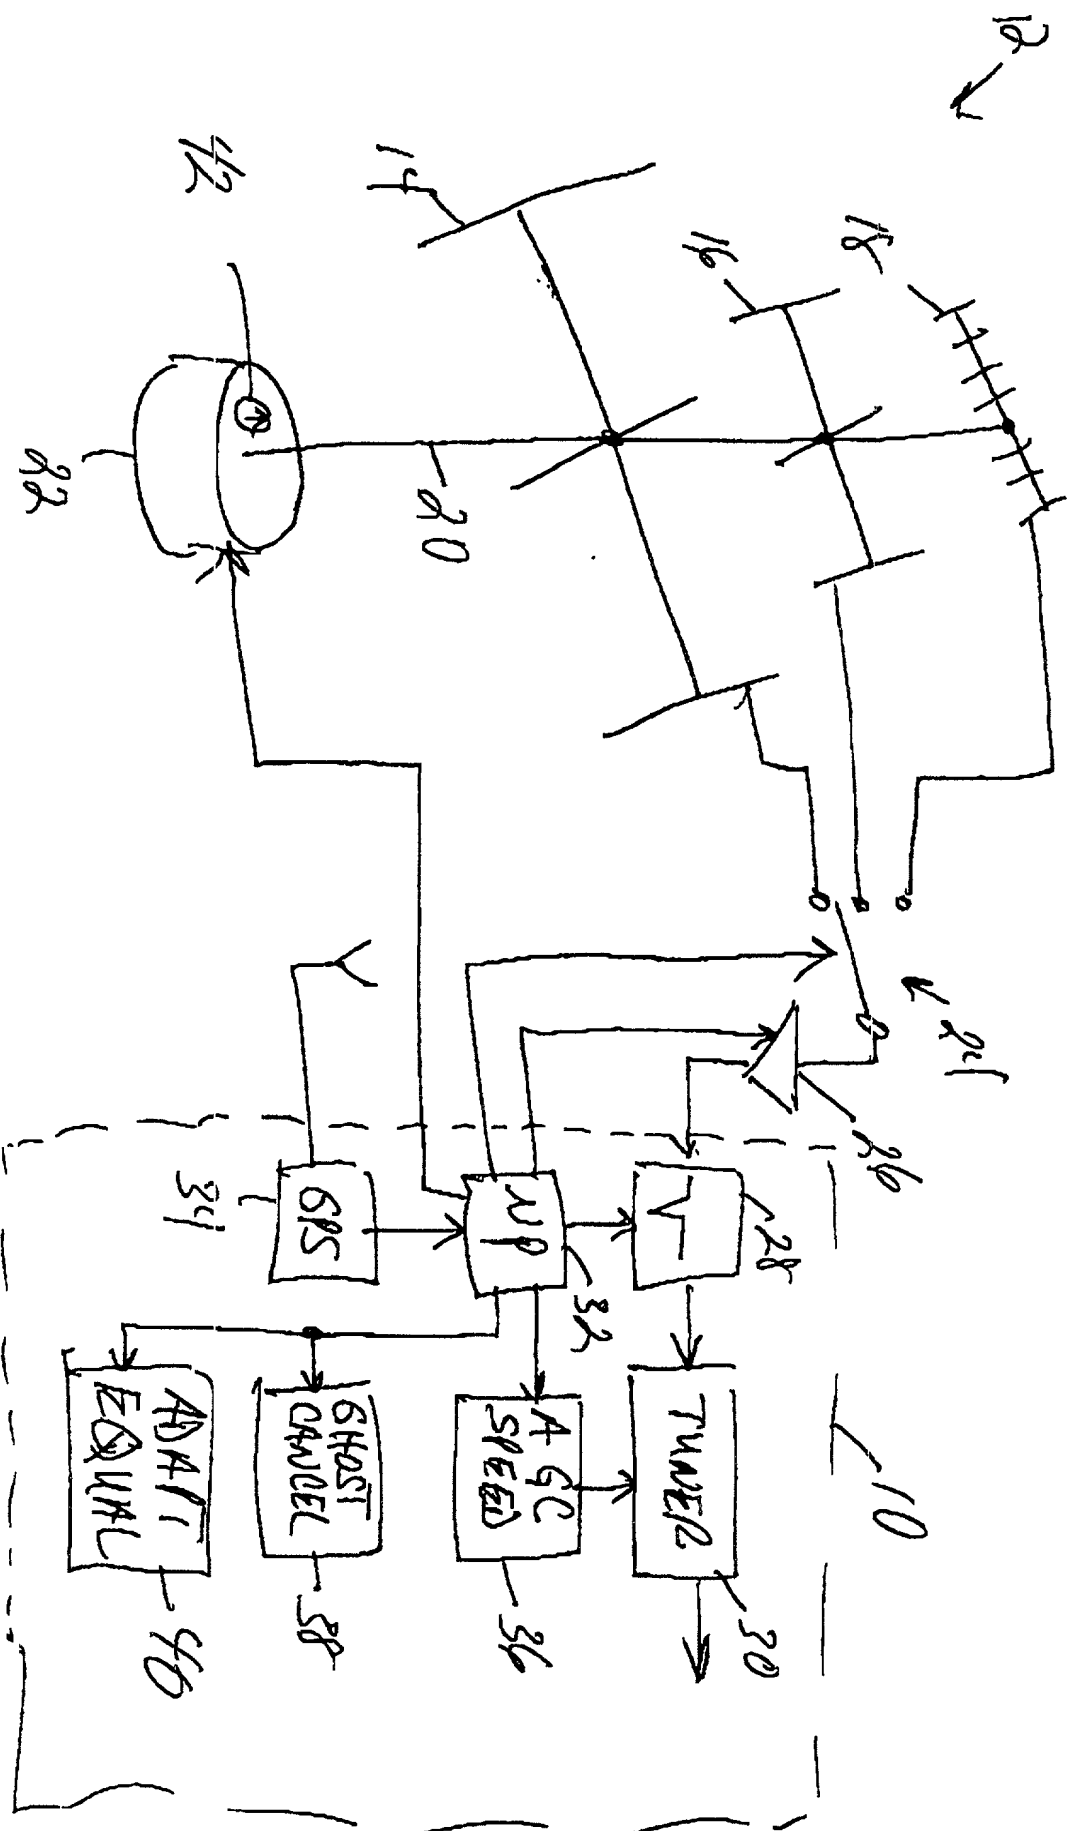

## DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

Atty. Docket No.7125

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "**Smart Antenna For RF Receivers**," the specification of which (check one): ☒ is attached hereto, ☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable) \_\_\_\_\_ was filed as PCT International Application No. \_\_\_\_\_ on \_\_\_\_\_ and was amended under Article 19 on \_\_\_\_\_ (if applicable). I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

## Priority Claimed

(Application Serial Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Application Serial Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

(Application Serial Number) (Day/Month/Year Filed)

(Application Serial Number) (Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in 37 U.S.C. §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial Number) (Day/Month/Year Filed) (Status - Patented, Pending or Abandoned)

(Application Serial Number) (Day/Month/Year Filed) (Status - Patented, Pending or Abandoned)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Jack Kail Registration No. 27,566

## SEND CORRESPONDENCE TO:

FIRM NAME	PHONE NO	STREET	CITY & STATE	ZIP CODE
Jack Kail Zenith Electronics Corporation	847-391-8011	1000 Milwaukee Avenue	Glenview, IL	60025

Full Name of First or Sole Inventor <b>David S. Tait</b>	Citizenship <b>USA</b>
Residence Address - Street <b>169 Brookwood Place</b>	Post Office Address - Street <b>169 Brookwood Place</b>
City (Zip) <b>Wood Dale 60191</b>	City (Zip) <b>Wood Dale 60191</b>
State or Country <b>Illinois</b>	State or Country <b>Illinois</b>
Date <b>6-15-00</b>	Signature 
Full Name of Second Inventor	Citizenship
Residence Address - Street	Post Office Address - Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature
Full Name of Third Inventor	Citizenship
Residence Address - Street	Post Office Address - Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature